

ARALDITE STANDARD

The Heavyweight Adhesive

The high bond strength adhesive for a wide variety of substrates.

Araldite® Standard is a two component epoxy adhesive used to bond a variety of substrates. It is suitable for bonding a wide variety of metals, stone, wood, glass, ceramic, rubber, dry concrete, asbestos, cement & bison board, fabric, leather & most rigid plastics.



Key Features



High bond strength of 120 kg / sq.cm and load bearing capacity of 470+ Kg



Highest coverage of 120 sq.ft. / 1.8 kg set



Easy to mix



Heat & Chemical Resistant

Other Features

- Compatible with Multiple Substrates
- Waterproof
- Highly Durable
- Pot life - 45 to 50 Mins
- Setting time - 6 to 7 Hrs
- Mixing Ratio by volume 1 : 1
- Color: Pale Yellow

Application Areas



Door & Window framing



Kitchen platform



Staircases & its Metal railings



Vertical cladding of Stones



Wooden furniture




Industries like sports goods, speaker etc.

Available in: 5g, 9g, 13g, 36g, 90g, 180g, 270g, 450g, 700g, 1.08kg, 1.8kg, 3.6kg, 5.4kg, 9kg


How to apply



Roughen, degrease & dry surfaces to be bonded




Mix equal Volume of Resin & Hardener; Use the mix within 45 minutes



Apply thin layer on both surfaces and clamp joint overnight

Comparison with Competition

Superior Coverage	1.8 kg Pack	Coverage per 1.8 kg (sq ft)	MRP(₹)	Coverage per kg (sq ft)	Cost per kg (₹)	Cost per sq. ft. (₹)
	Araldite Standard	120	1625.00	66.67	902.78	13.54
	Competition B	80	1,200.00	44	667.00	15.00

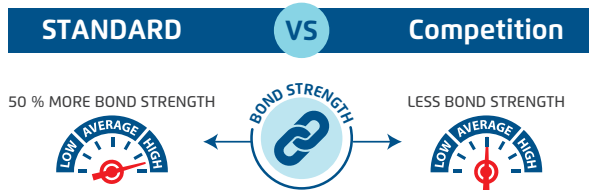

6.45 MPa

218-250 kg bond strength

14.16 MPa

437-500 kg bond strength